Architect
UCR Planning & Design
Masonry Contractor
Winegardner Masonry, Inc.

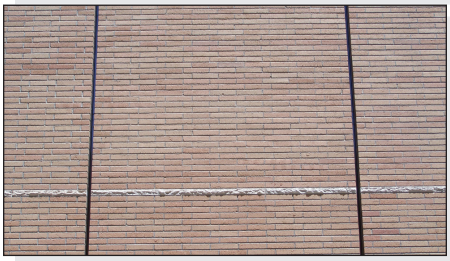

Photos: Thomas Escobar, MIA

UCR - ENGINEERING BUILDING UNIT #2

RIVERSIDE, CALIFORNIA

Owner
University of California Riverside
Riverside, CA

Architect
UCR Planning & Design
Riverside, CA

General Contractor
Swinerton Builders
Irvine, CA

Masonry Contractor
Winegardner Masonry, Inc.
Yucaipa, CA

Masonry Material
Sepulveda Building Materials and Orco Block

Square Feet of Masonry
77,300 Sq. Ft.

Cost of Masonry
$2,150,000

Stories
6

The Engineering Building Unit #2 at the University of California, Riverside shows a high level of design and construction quality.

The building exterior is faced with 4 inch Norman face brick veneer with Hohmann & Barnard anchor system.

The UC Riverside Campus continues to maintain the environment using brick as the preferred building exterior. The single course white bands accent the brick, providing a unique character for this building. Another feature is the deep vertical recesses that allow for frequent spacing of expansion joints. This allows for system performance while maintaining aesthetic balance.

Construction by a signatory mason contractor using members of Bricklayers & Allied Craftsman Union Locals

MASONRY INSTITUTE OF AMERICA
Post Office Box 3905
Torrance, CA 90510-3905
Toll free: (800) 221-4000
www.masonryinstitute.org